

# primus

## High Spin Industrial Washer Extractors FS 33, FS 40, FS 55



### FEATURES


- Freestanding, high spin
- Stainless steel cabinet (AISI 304)
- Stainless steel drum and tub
- Standard Full control (FC) microprocessor (multilingual, freely programmable)
- Large door opening (53 cm) for easy loading and unloading
- Large drain valves (2 x 75 mm)
- Easy access to all parts
- Standard liquid soap connections
- Frequency controlled motor
- Patented soap dispenser with 5 removable compartments
- Power Wash® perforated lifting ribs: more mechanical action, lower water consumption

### OPTIONS

- Low steam pressure heating
- Liquid soap pumps
- Soft wash version (wet cleaning)
- Liquid manifold
- LPMS networking software

**POWERWASH®**

| TYPE                        |                      | FS 33   | FS 40                                   | FS 55  |
|-----------------------------|----------------------|---|---|--|
| <b>CAPACITY</b>             |                      |   |   |  |
| Drum volume                 | l                    | 335   | 400                                     | 518  |
| Capacity                    | kg                   | 33  | 40                                      | 55   |
| Drum dimensions             | mm                   | ∅914x510  | ∅914x610                                | ∅914x790                                     |
| <b>MOTOR</b>                |                      |   |   |  |
| Frequency controlled        |                      | standard  | standard                                | standard                                     |
| <b>DRUM SPEED</b>           |                      |   |   |  |
| Wash speed                  | rpm                  | 7-50  | 7-50                                    | 7-50   |
| Distribution speed          | rpm                  | 90  | 90                                      | 90   |
| Spin speed                  | rpm                  | 301-830   | 301-830                                 | 301-830                                      |
| G-factor                    |                      | 365   | 351                                     | 351  |
| <b>PROGRAMMER</b>           |                      |   |   |  |
| FC microprocessor           |                      | standard  | standard                                | standard                                     |
| <b>CABINET</b>              |                      |   |   |  |
| Stainless steel AISI 304    |                      | standard  | standard                                | standard                                     |
| <b>SAFETY FIXING</b>        |                      |   |   |  |
|                             |                      | 4xM16   | 4xM16                                   | 4xM16  |
| <b>HEATING</b>              |                      |   |   |  |
| 100% hot water              | °C                   | 90  | 90                                      | 90   |
|                             | °F                   | 194   | 194                                     | 194  |
| 100% electrical             | kW                   | 24  | 36                                      | 54   |
| Hot water and electrical    | kW                   | 24  | 36                                      | 54   |
| Steam additional heating    | bar                  | 3-8   | 3-8                                     | 3-8  |
| Steam high pressure         | bar                  | 3-8   | 3-8                                     | 3-8  |
| <b>CONNECTION</b>           |                      |   |   |  |
| Electrical                  | 220-240V<br>380-400V | 3AC+PE/60Hz<br>3AC+PE+N/50Hz<br>Others on request | 3AC+PE<br>3AC+PE+N<br>Others on request | 3AC+PE<br>3AC+PE+N/50Hz<br>Others on request |
| Water inlet                 | inch                 | 1"  | 1"                                      | 1"   |
| Steam inlet                 | inch                 | 3/4"  | 3/4"                                    | 3/4"   |
| <b>DIMENSIONS</b>           |                      |   |   |  |
| HxWxD                       | mm                   | 1905x1195x1330                                    | 1905x1195x1430                          | 1905x1195x1610                               |
| <b>TRANSPORT DATA</b>       |                      |   |   |  |
| Gross weight                |                      |   |   |  |
| Crate packing               | kg                   | 1370  | 1700                                    | 1770   |
| Net weight                  | kg                   | 1230  | 1560                                    | 1630   |
| Volume (packed)             |                      |   |   |  |
| Crate packing               | m <sup>3</sup>       | 4,4   | 4,7                                     | 5,3  |
| Crate packing HxWxD         | mm                   | 2105x1430x1475                                    | 2105x1430x1570                          | 2105x1430x1750                               |
| Standard = Standard version |                      |   |   |  |

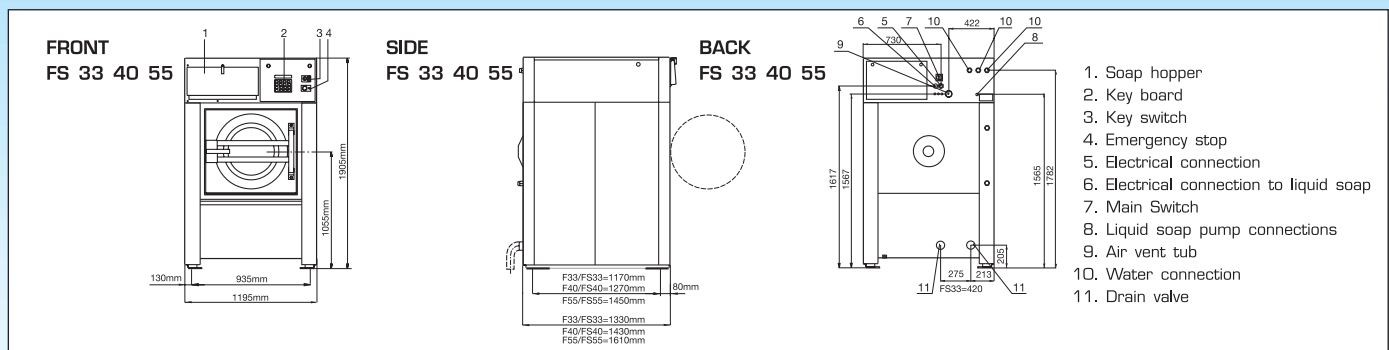

The company Primus bvba preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)

primus

Quality without compromise

**Bvba**  
Certified Company  
ISO 9001

**CE**